

Lidder Range

➤ Fibre King lidding machines will give you decades of perfectly sealed packaging, and save you endless headaches along the way.

Able to handle multiple case heights without slowing production. The 4 Mag Lidder (shown) will deliver **20 cycles per minute for chilled product; 17 for frozen**. Easy delivery and installation, maintenance, operation and capacity upgrades make this the ideal, compact lidder for your business.

At Fibre King, we don't just build machines – we engineer peace of mind. Call us on **+61 7 3293 8800** to see how we can help you.



Lidder Features

Products

Chilled or frozen dedicated machines or a combined chilled/frozen machine.

Production Rate

Chilled 20cpm, frozen 17cpm.

Magazines Upgrades

1 to 6 (expandable).

Case Heights

Random lidding of common footprint cases.
Combined Chilled/Frozen handles 2 base sizes.

Flexible Layout

Can be configured for custom infeed/outfeed orientations.
With the inclusion of the pivoting flight bar conveyor, the machine is **future proofed** for relocation.

Easy Installation

Designed to be shipped in one piece – within standard shipping restrictions.

Door Step Indexer

Positive case separation with excellent line pressure control.

Flight Bar Case Transport

Positive case location with load distribution across the case to **minimise the risk of case damage**.

Endless Chain Dog Style Lid Indexing System

Synchronised to the flight bar case transport ensures **100% matching of lid to case**.


Guarding AS4024.1- 2006 or equivalent

Fully interlocked doors assist in access and visibility.


Flight Bar

Quiet Operation

Less than 80dB

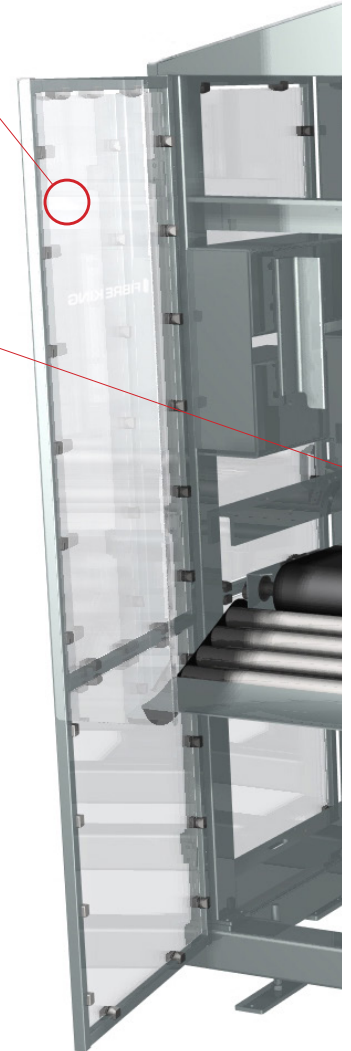

Lid Types

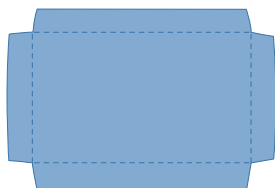

> Frozen & chilled

“We’ve seen significant improvement in our production rates and the quality of our product... the new cartons make us look a whole lot better out there in the market.”

Murray Wilson, Plant Manager, JBS Swift Dinmore

Touch Screen/PLC

Advanced control system with remote access and diagnostics.

Lid Indexer

Heavy Duty Construction

for use in 24 hour per day production environments - designed for a serviceable life of in excess of 15 years.

Blank Magazines

1-6

Heavy Duty Doors and Clean, Open Design

means easy operator and maintenance access

Hot Melt System

Coupled with the PLC results in the versatile and reliable application of the hot melt adhesive.

Hinged Electrical Box

For easier maintenance access.



> Able to handle multiple case heights without slowing production.

The Fibre King Difference

> More Uptime

Fibre King machines are designed and manufactured to withstand constant, rigorous use. Changeovers happen quickly and seamlessly; and we build in easy access for maintenance and upgrades. Our remote monitoring, PLC programming and service standards are such that some of the world's biggest companies choose Fibre King as their preferred supplier.

> Lower Overall Cost of Use

Let's start with strategic design – we make a study of the end use and create a machine that does what it needs to most efficiently, using the best technology available. Our classic Fibre King machines are tailored to your exact requirements, and the beauty is that if your requirements change, the equipment can usually be converted to suit. Less operator intervention is required on a Fibre King machine; your products will be better protected in transit because of our superior quality packs; and all this is backed by faster maintenance and support, plus competitively priced spares.

> 'No Excuses' Service

We stand by our word, and move heaven and earth to make it happen.

“Equipment failure can mean millions of dollars in lost profits for Amcor customers. Reliable, flexible, serviceable products are what we look for from our preferred partners - Fibre King consistently matches our requirements.”

Mark Krygger, Orora Group



9 Oasis Court, PO BOX 3051 Clontarf DC Q 4019 Australia For peace of mind call t. +61 3293 8800 f. +61 7 3293 8888

e. sales@fibreking.com w. www.fibreking.com | Case Packers | Palletisers | Meat Equipment | Crate Equipment



ISO 9001